


Tapered Connector Minimum Lengths

650	550	550	500	450	400	350	350	300	250	200	150	100	X
600	500	500	450	400	350	350	350	250	200	150	100	X	100
550	450	450	400	350	350	300	250	200	150	100	X	100	150
500	400	400	350	350	300	250	200	150	100	X	100	150	200
450	350	350	350	300	250	200	150	100	X	100	150	200	250
400	350	300	300	250	200	150	100	X	100	150	200	250	300
350	300	250	250	200	150	100	X	100	150	200	250	350	350
300	250	200	200	150	100	X	100	150	200	250	300	350	350
250	200	200	150	100	X	100	150	200	250	300	350	350	400
200	150	100	100	X	100	150	200	250	300	350	350	400	450
150	100	100	X	100	150	200	250	300	350	350	400	450	500
125	100	X	100	100	200	200	250	300	350	400	450	500	550
100	X	100	100	150	200	250	300	350	350	400	450	500	550
DIA	100	125	150	200	250	300	350	400	450	500	550	600	650

BLACK NUMBERS: MINIMUM 'CL' LENGTH

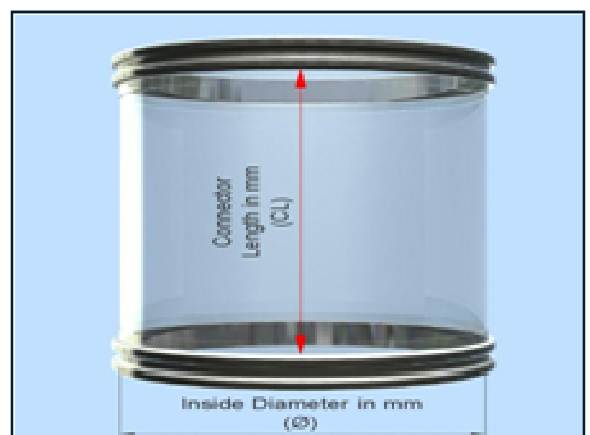

BFM Global Ltd
 PO Box 66-087
 Beach Haven, Auckland 0749, New Zealand
 Email: sales@BFMfitting.com
www.BFMfitting.com

 **BFM**[®]
fitting
"Keeping You Connected"