


CLEAR-FLEX SDX IS AVAILABLE IN A VARIETY OF FORMS, INCLUDING SEAMLESS TUBING, CUSTOM CONNECTORS, MOLDED CORRUGATED SLEEVES, AND DURA-BALLS.



CLEAR-FLEX SDX & CLEAR-FLEX CUSTOM CONNECTORS

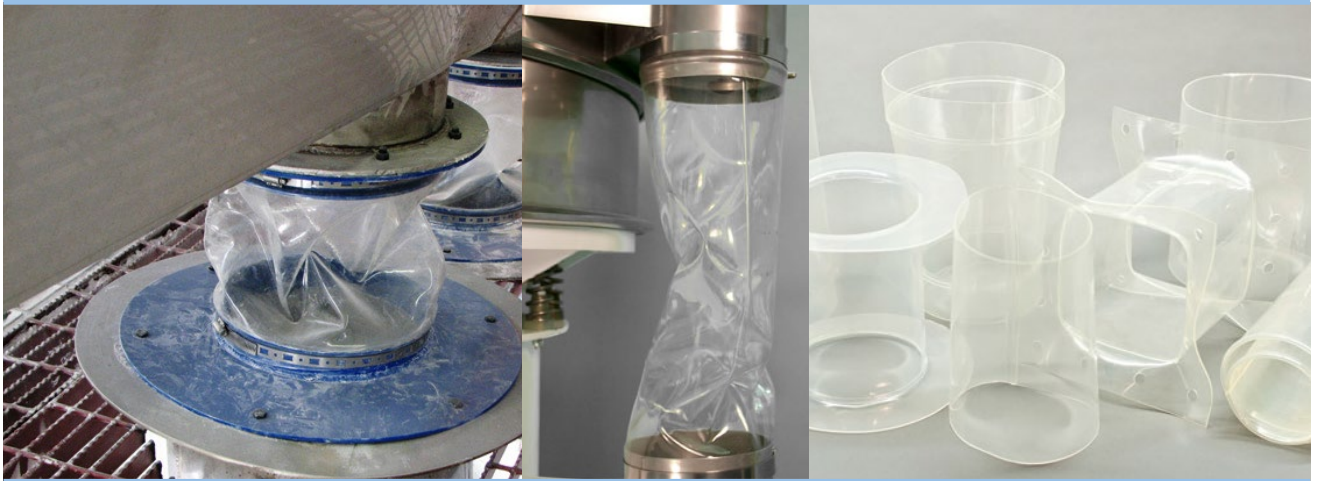

Polyether-based thermoplastic polyurethane compound. Proprietary formulate meets the static dissipation requirements of the ATEX Directive and NEC Class II, Div I and Div 2. EC 10/2011 compliant. FDA-acceptable for direct food contact per CFR 21.177.1680. UV stabilized, low relative humidity permanent ESD protection, clear (natural) color. Clear-Flex SDX is phthalate-free.

Clear-Flex SDX polyurethane is available in custom connector designs. Our precision computerized cutting and welding technology allows us to turn your CAD drawing into a Clear-Flex SDX custom connector.

SPECIFICATIONS

ABRASION RESISTANCE	●●●●●	OUTSTANDING
TEARING RESISTANCE	●●●●●	EXCELLENT
FLEX FATIGUE RESISTANCE	●●●●●	EXCELLENT
OIL/GREASE*	●●●●●	GOOD
WEATHERING	●●●●●	EXCELLENT
RESISTANCE TO WATER ABSORPTION	●●●●●	EXCELLENT
ACID (DILUTE)*	●●●●●	GOOD
ACID (CONCENTRATED)*	●●●●●	POOR
CHLORINATED HYDROCARBON*	●●●●●	GOOD
OPERATING TEMPERATURE	0° TO 223° F / -18° C TO 106° C	

JP Air Tech · Skifervej 2, DK-4990 Saksøbing · Denmark
Phone +45 5495 0025 · VAT No. DK 25054342 · Mail: jh@jpairtech.com

www.jpairtech.com